

Suzuki TS-125R Duster

Length 80.7"
 Width 33.3"
 Height 43.3"
 Wheel Base 51.6"
 Ground Clearance 9.3"
 Dry Weight 198 lbs.
 Engine Type 2-stroke air-cooled aluminum single-cylinder
 Bore & Stroke 2.20" x 1.97"
 C. C. 123
 Compression Ratio 6.7:1
 Carburetor VM24
 Maximum Output 13.0 hp/7000 rpm
 Maximum Torque 9.8 ft.-lbs./6500 rpm
 Speed Range 65-70 mph
 Transmission 5-speed constant mesh
 Clutch Multi-plate, wet disc
 Starter Primary kick
 Brakes: Front Right hand, internal expanding
 Rear Right foot, internal expanding
 Suspension: Front Telescopic, oil-dampened
 Rear Swinging arm, oil-dampened
 Tires: Front 2.75-19-4PR
 Rear 3.25-18-4PR
 Color Daytona Blue, Aspen Yellow
 Fuel Tank Capacity 1.8 gals.
 Oil Tank Capacity 2.3 pts.
 Instruments Speedometer/Tripmeter, Tachometer
 Climbing Ability 34°
 Front Fork Travel 6.0"

All prices and specifications subject to change without notice.




*Covers all internal parts of cylinder head, block and transmission. Purchaser must comply with Owner's Manual Instructions: mail registration to Suzuki within 48 hours, and receive service checks from a franchised Suzuki dealer at 750, 2,000 and every 2,000 miles thereafter during warranty period.




Famous 12 month/12,000 mile warranty*



Heavy duty skid plate



Tach/speedo module with Tripmeter

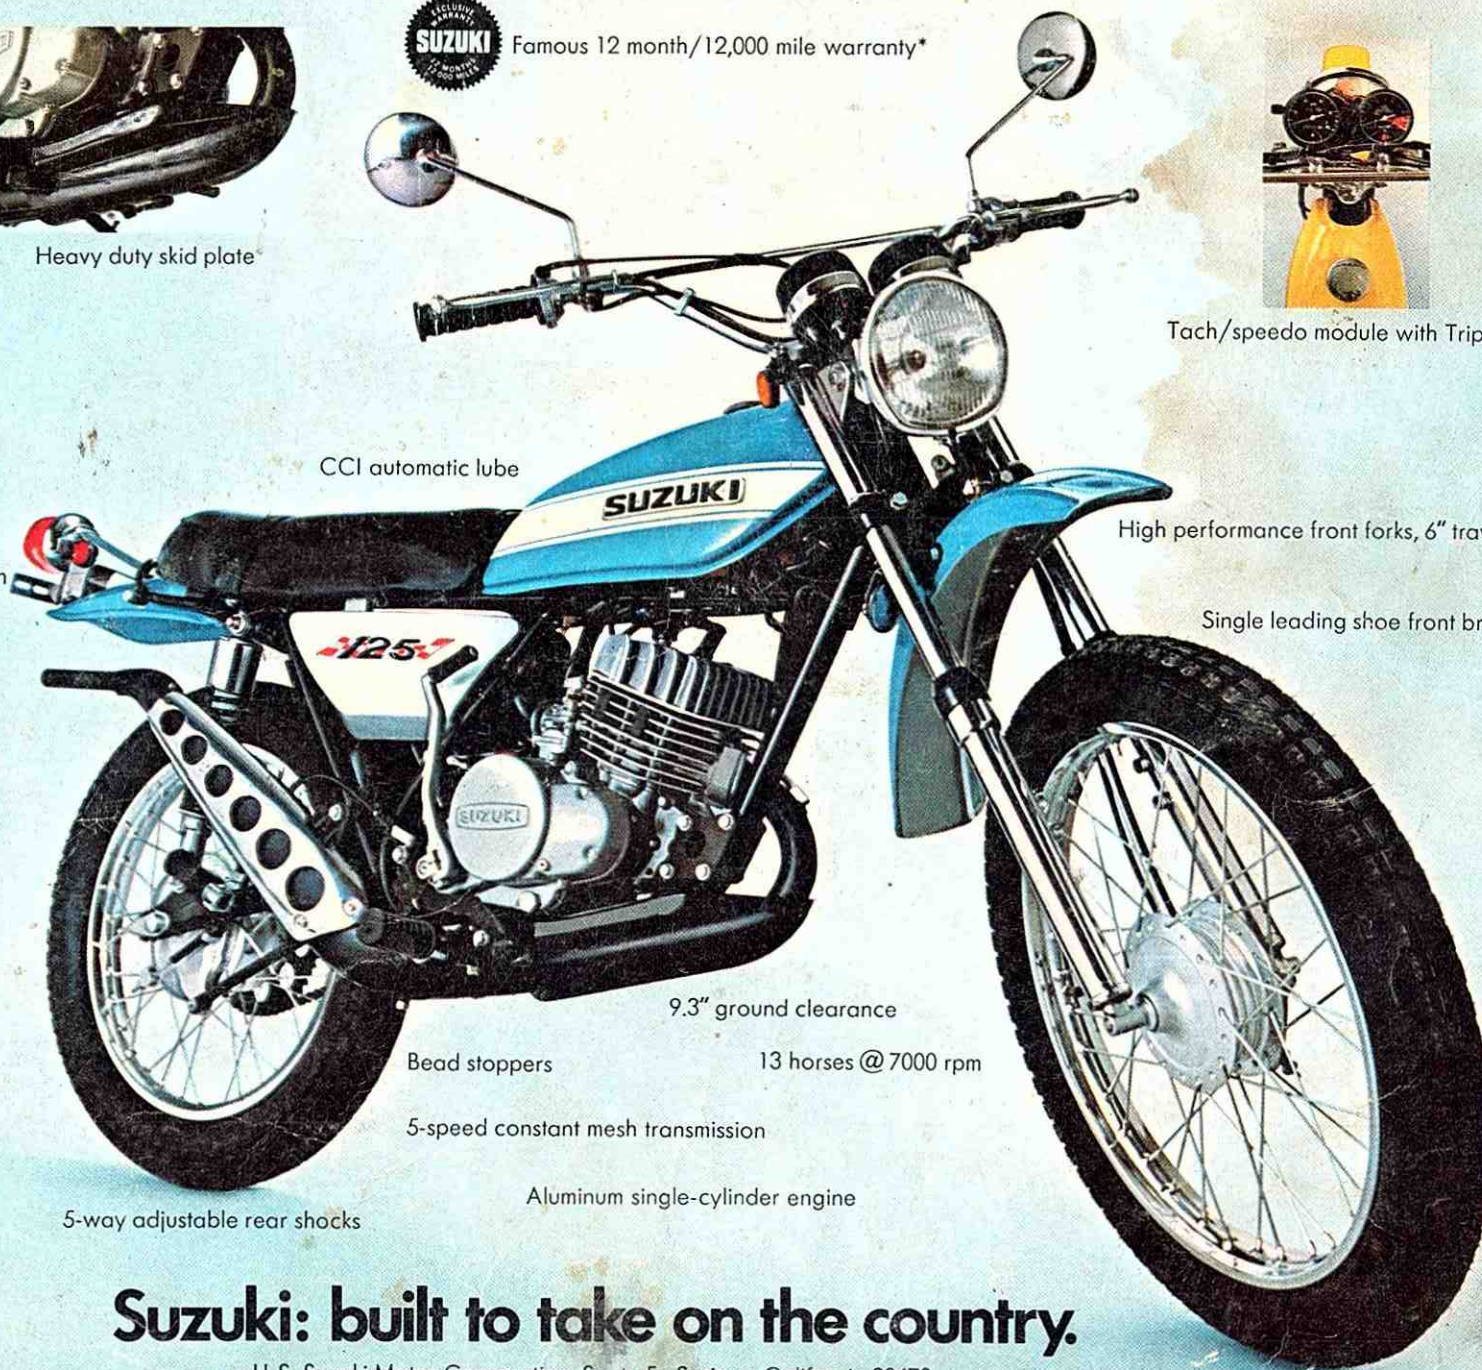

CCI automatic lube

High performance front forks, 6" travel

Single leading shoe front brakes

9.3" ground clearance

Bead stoppers

13 horses @ 7000 rpm

5-speed constant mesh transmission

Aluminum single-cylinder engine

5-way adjustable rear shocks

Suzuki: built to take on the country.

U.S. Suzuki Motor Corporation, Santa Fe Springs, California 90670

Suzuki TS-185R Sierra


Length 80.1"
 Width 33.0"
 Height 44.7"
 Wheel Base 52.8"
 Ground Clearance 9.7"
 Dry Weight 218 lbs.
 Engine Type 2-stroke air-cooled aluminum single-cylinder
 Bore & Stroke 2.52" x 2.24"
 C. C. 183
 Compression Ratio 6.7:1
 Carburetor VM26
 Maximum Output 17.5 hp/7000 rpm
 Maximum Torque 13.5 ft.-lbs./6000 rpm
 Speed Range 70-75 mph
 Transmission 5-speed constant mesh
 Clutch Multi-plate, wet disc
 Starter Primary kick
 Brakes: Front Right hand, internal expanding
 Rear Right foot, internal expanding
 Suspension: Front Telescopic, oil-dampened
 Rear Swinging arm, oil-dampened
 Tires: Front 3.00-19-4PR
 Rear 3.50-18-4PR
 Color Strip Orange, Hawaii Green
 Fuel Tank Capacity 1.8 gals.
 Oil Tank Capacity 2.3 pts.
 Instruments Speedometer/Tripmeter, Tachometer
 Climbing Ability 35°
 P.E.I. (Pointless Electronic Ignition)
 Front Fork Travel 6.0"



5-way adjustable rear shocks



Famous 12 month/12,000 mile warranty*

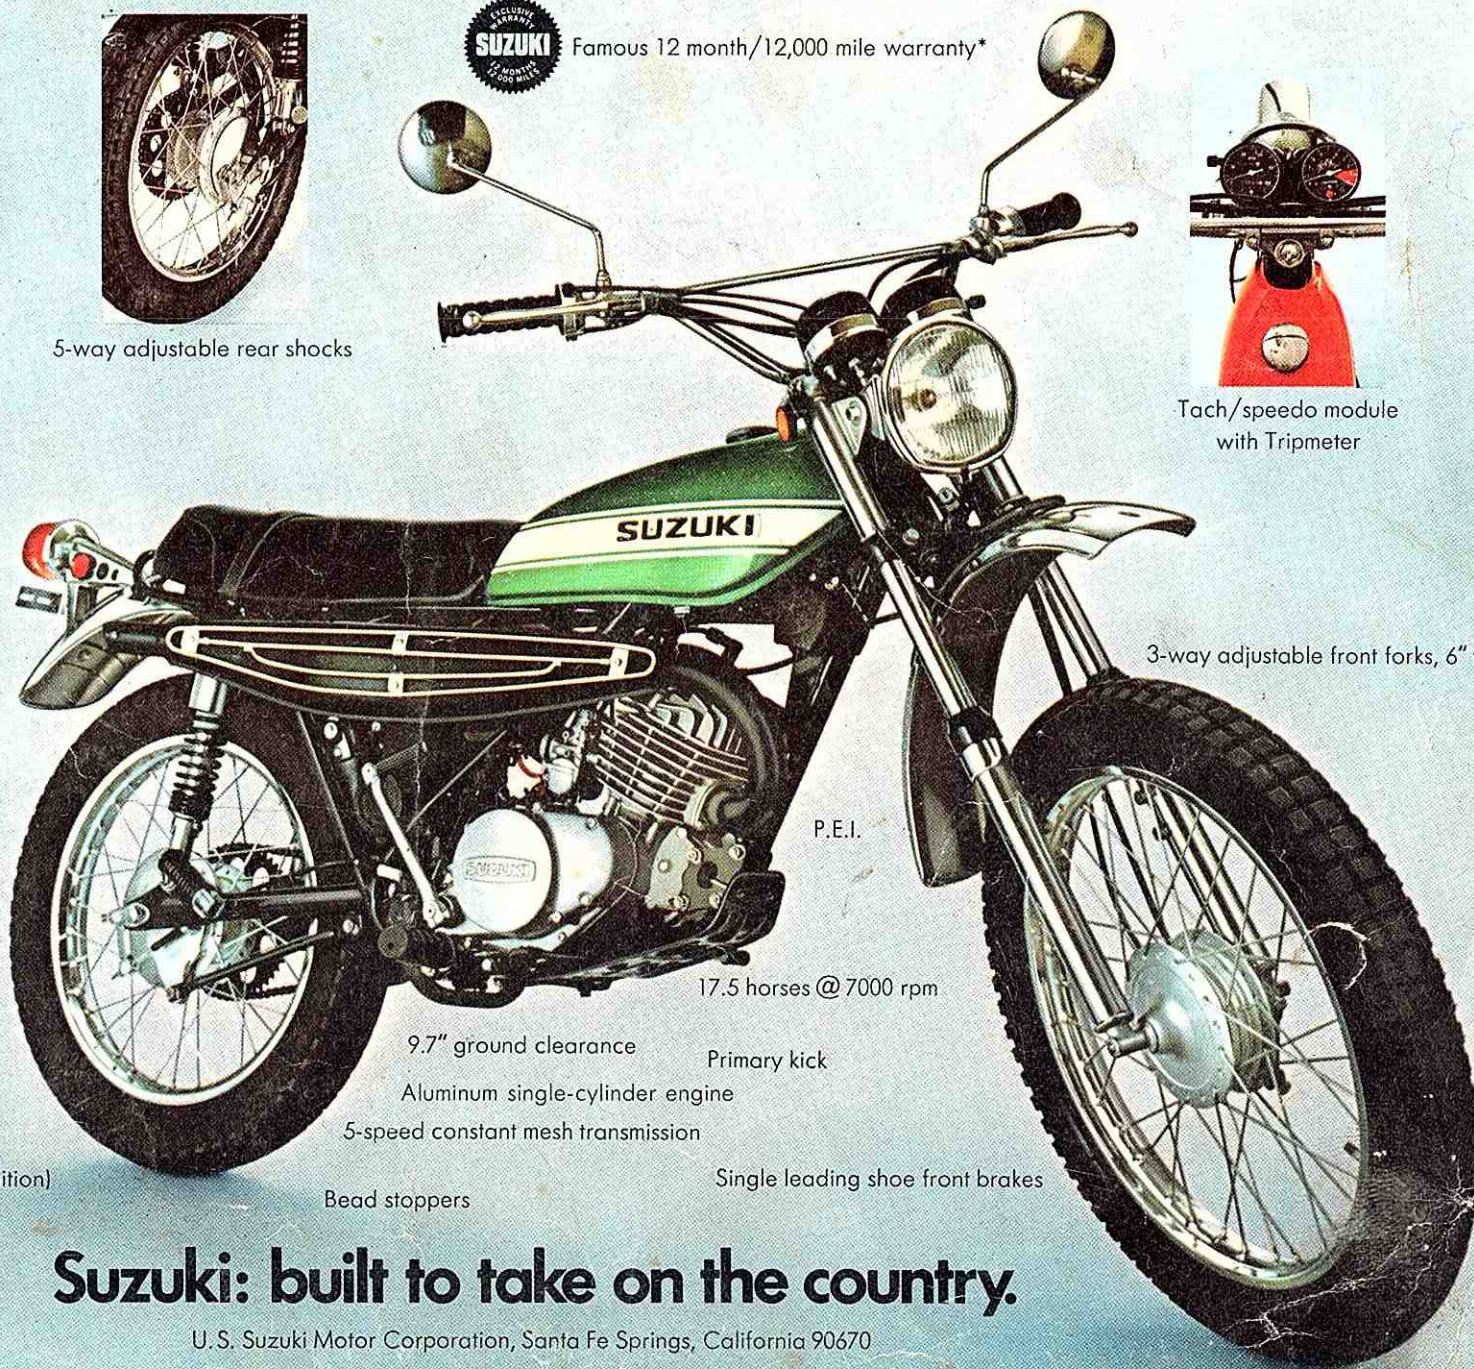

Tach/speedo module with Tripmeter

3-way adjustable front forks, 6" travel

P.E.I.

17.5 horses @ 7000 rpm

9.7" ground clearance

Primary kick

Aluminum single-cylinder engine

5-speed constant mesh transmission

Single leading shoe front brakes

Bead stoppers

Suzuki: built to take on the country.

U.S. Suzuki Motor Corporation, Santa Fe Springs, California 90670



*Covers all internal parts of cylinder head, block and transmission. Purchaser must comply with Owner's Manual Instructions; mail registration to Suzuki within 48 hours, and receive service checks from a franchised Suzuki dealer at 750, 2,000 and every 2,000 miles thereafter during warranty period.

Part No. 99404-28000

Litho in USA